




Pitch:5.0/10.0mm

MODEL:JL300V

认证/CERTIFICATION	
------------------	---

材质及电镀		
螺丝	M3.0, 钢, 镀锌	
弹片	磷青铜, 镀镍	
方针	黄铜, 镀锡	
塑件	PBT, UL94V-0	
电气性能		
参考标准	UL	IEC
额定电压	250V	250V
额定电流	16A	17.5A
使用线径	22-14AWG	1.5mm ²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
机械性能		
温度范围	-30℃~+120℃	
瞬时温度	+250℃ 5秒	
扭矩	5.10kgf-cm/0.5Nm/4.43Lbin	
剥线长度	4.5-5mm	

MATERIAL		
Screws	M3.0 Steel Zn plated	
Shrapnel	Phosphor bronze, Ni plated	
Pin header	Brass, Sn plated	
Housing	PBT, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	17.5A
Wire range	22-14AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-30℃~+120℃	
Max. soldering	+250℃ for 5 Sec	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length	4.5~5mm	

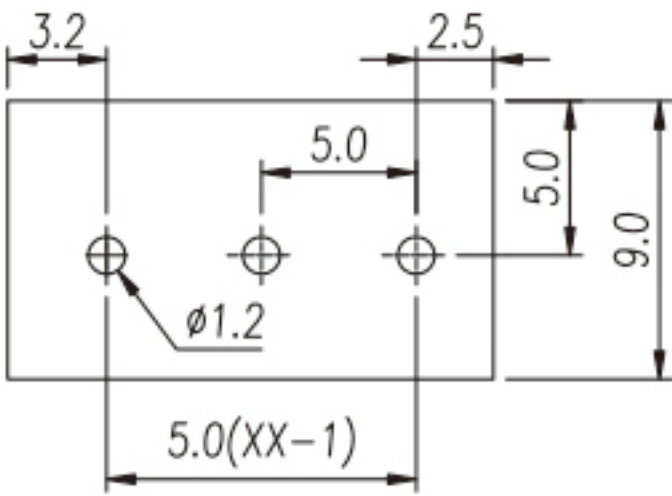

P.C.B. LAYOUT

