




Pitch:5.08/7.62mm

MODEL:JL129V

认证/CERTIFICATION			
材质及电镀			
螺丝		M3.0, 钢, 镀锌	
方块		黄铜, 镀镍	
焊脚		黄铜, 镀锡	
塑件		PA66, UL94V-0	
电气性能			
参考标准		UL	IEC
额定电压		300V	250V
额定电流		20A	20A
使用线径		26-12AWG	2.5mm ²
接触电阻		20mΩ	
绝缘电阻		500MΩ/DC500V	
耐电压		AC2000V/1Min	
机械性能			
温度范围		-40℃~+105℃	
瞬时温度		+250℃ 5秒	
扭矩		5.10kgf-cm/0.5Nm/4.43Lbin	
剥线长度		6-7mm	

MATERIAL			
Screws		M3.0 Steel Zn plated	
Cage		Brass, Ni plated	
Pin header		Brass, Sn plated	
Housing		PA66, UL94V-0	
ELECTRICAL			
Standard		UL	IEC
Rated voltage		300V	250V
Rated current		20A	20A
Wire range		26-12AWG	2.5mm ²
Contact resistance		20mΩ	
Insulation resistance		500MΩ/DC500V	
Withstanding voltage		AC2000V/1Min	
MECHANICAL			
Temp. range		-40℃~+105℃	
Max. soldering		+250℃ 5 Sec	
Torque		5.10kgf-cm/0.5Nm/4.43Lbin	
Strip length		6-7mm	

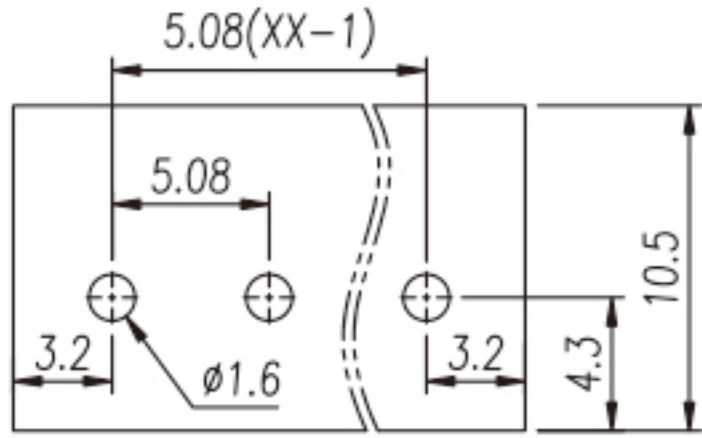

P.C.B. LAYOUT

