




Pitch:10.16mm

MODEL:JL116V

认证/CERTIFICATION			
材质及电镀			
螺丝		M4.0, 钢, 镀锌	
方块		黄铜, 镀镍	
焊脚		黄铜, 镀锡	
塑件		PA66, UL94V-0	
电气性能			
参考标准		UL	IEC
额定电压		300V	750V
额定电流		52A	57A
使用线径		26-6AWG	10.0mm ²
接触电阻		20mΩ	
绝缘电阻		500MΩ/DC500V	
耐电压		AC2000V/1Min	
机械性能			
温度范围		-40℃~+105℃	
瞬时温度		+250℃ 5秒	
扭矩		12.24kgf-cm/1.2Nm/10.53Lbin	
剥线长度		10-11mm	
MATERIAL			
Screws		M4.0 Steel Zn plated	
Cage		Brass, Ni plated	
Pin header		Brass, Sn plated	
Housing		PA66, UL94V-0	
ELECTRICAL			
Standard		UL	IEC
Rated voltage		300V	750V
Rated current		52A	57A
Wire range		26-6AWG	10.0mm ²
Contact resistance		20mΩ	
Insulation resistance		500MΩ/DC500V	
Withstanding voltage		AC2000V/1Min	
MECHANICAL			
Temp. range		-40℃~+105℃	
Max. soldering		+250℃ 5 Sec	
Torque		12.24kgf-cm/1.2Nm/10.53Lbin	
Strip length		10-11mm	

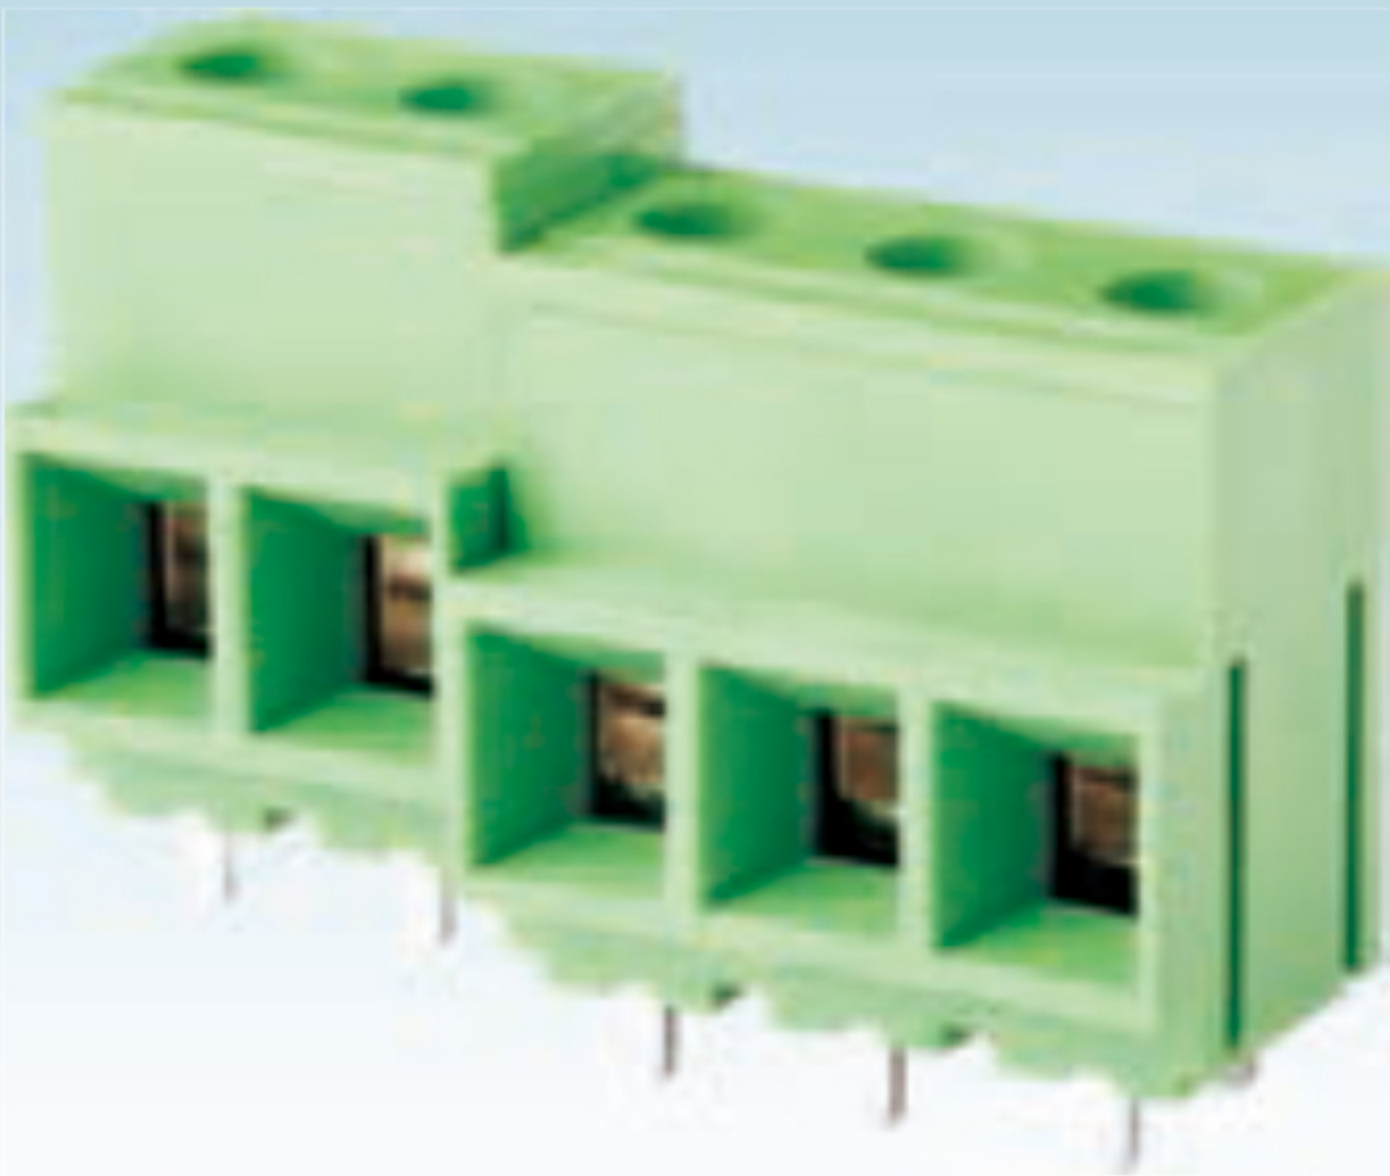