


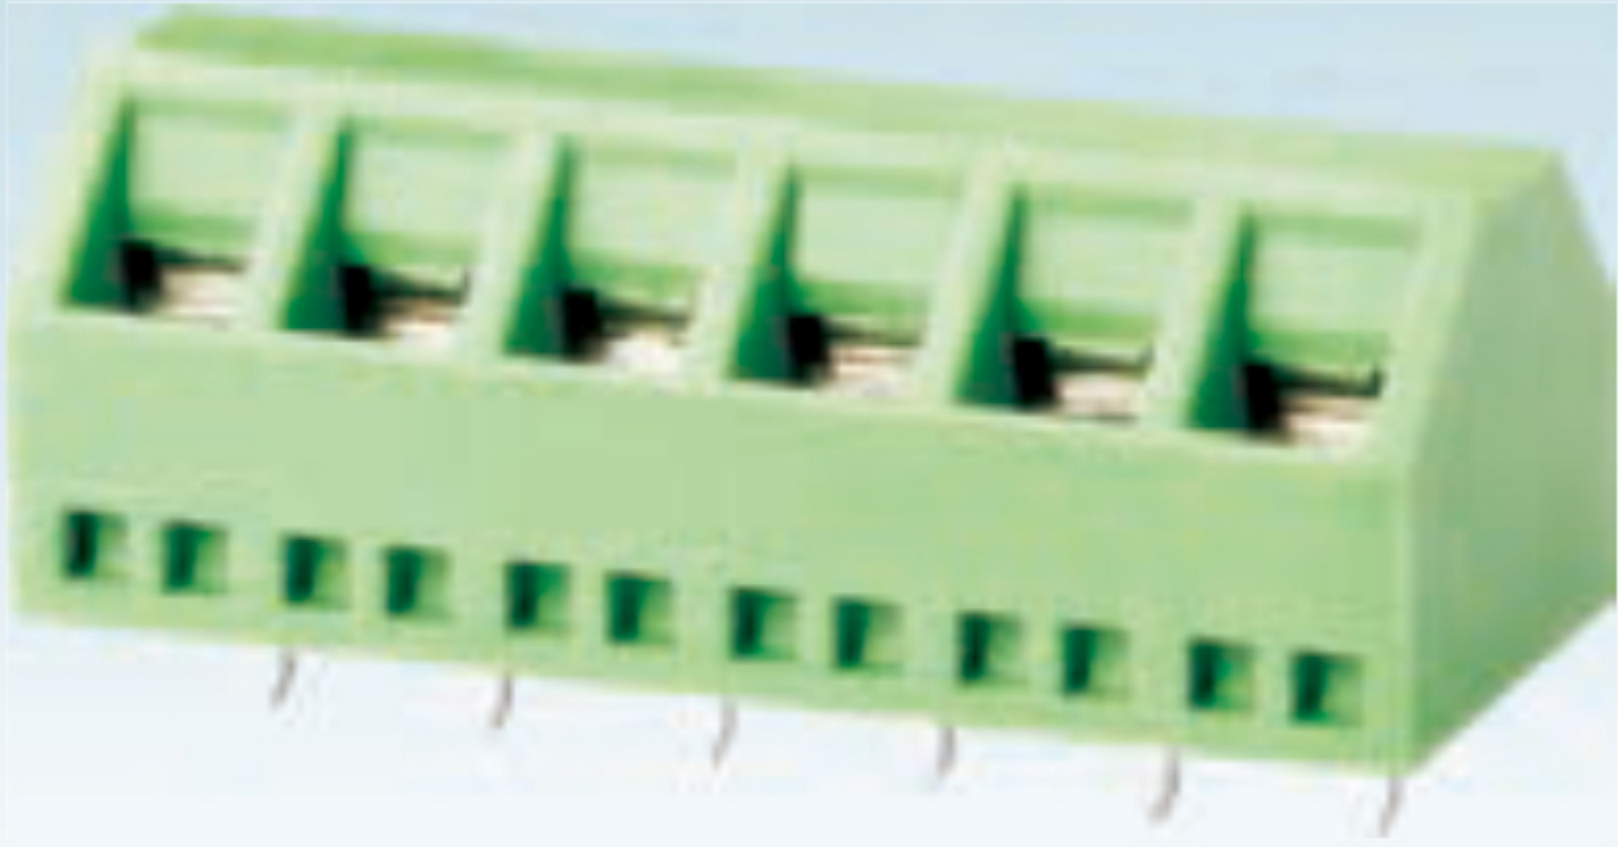

Pitch:5.08mm

MODEL:JL508V

|                  |  |
|------------------|--|
| 认证/CERTIFICATION |  |
|------------------|--|

|       |                            |
|-------|----------------------------|
| 材质及电镀 |                            |
| 螺丝    | M2.5, 钢, 镀锌                |
| 方块    | 黄铜, 镀镍                     |
| 焊脚    | 黄铜, 镀锡                     |
| 塑件    | PA66, UL94V-0              |
| 电气性能  |                            |
| 参考标准  | ULIEC                      |
| 额定电压  | 300V250V                   |
| 额定电流  | 15A17.5A                   |
| 使用线径  | 26-14AWG1.5mm <sup>2</sup> |
| 接触电阻  | 20mΩ                       |
| 绝缘电阻  | 500MΩ/DC500V               |
| 耐电压   | AC2000V/1Min               |
| 机械性能  |                            |
| 温度范围  | -40℃~+105℃                 |
| 瞬时温度  | +250℃ 5秒                   |
| 扭矩    | 4.08kgf-cm/0.4Nm/3.54Lbin  |
| 剥线长度  | 6-7mm                      |

|                       |                            |
|-----------------------|----------------------------|
| MATERIAL              |                            |
| Screws                | M2.5 Steel Zn plated       |
| Cage                  | Brass, Ni plated           |
| Pin header            | Brass, Sn plated           |
| Housing               | PA66, UL94V-0              |
| ELECTRICAL            |                            |
| Standard              | ULIEC                      |
| Rated voltage         | 300V250V                   |
| Rated current         | 15A17.5A                   |
| Wire range            | 26-14AWG1.5mm <sup>2</sup> |
| Contact resistance    | 20mΩ                       |
| Insulation resistance | 500MΩ/DC500V               |
| Withstanding voltage  | AC2000V/1Min               |
| MECHANICAL            |                            |
| Temp. range           | -40℃~+105℃                 |
| Max. soldering        | +250℃ 5 Sec                |
| Torque                | 4.08kgf-cm/0.4Nm/3.54Lbin  |
| Strip length          | 6-7mm                      |

