


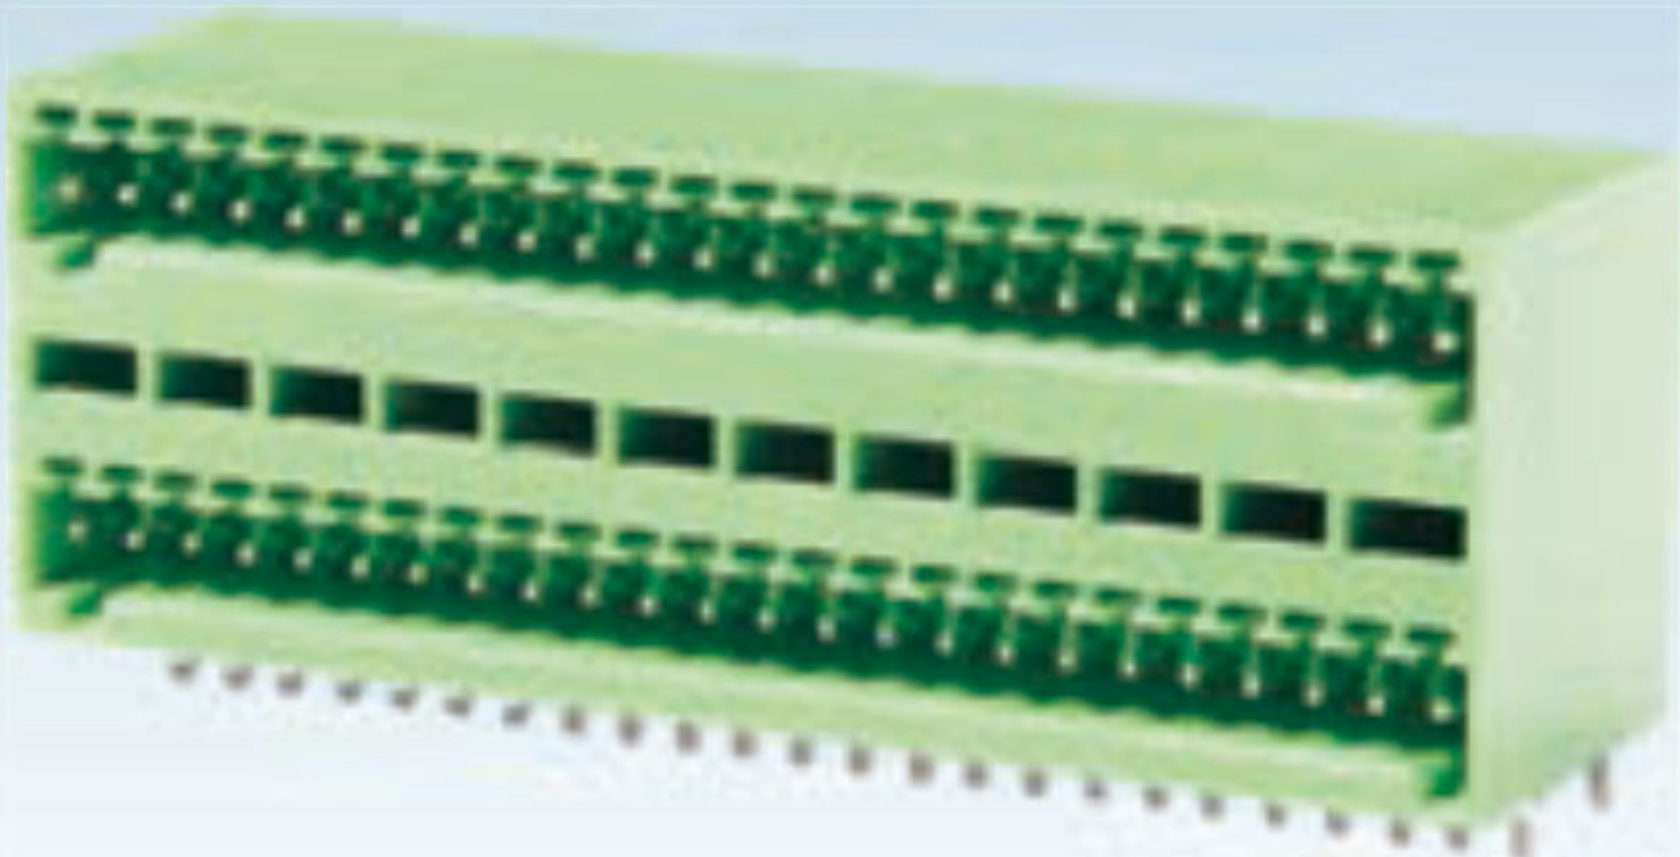

Pitch:2.5mm

MODEL:JL15EDGRH-2.5

认证/CERTIFICATION

材质及电镀

焊针 黄铜, 镀锡
塑件 PA66, UL94V-0

电气性能

参考标准	UL	IEC
额定电压	150V	130V
额定电流	5A	6A
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC1500V/1Min	

机械性能

温度范围 -40℃~+105℃
瞬时温度 +250℃ 5秒

MATERIAL

Pin header Brass, Sn plated
Housing PA66, UL94V-0

ELECTRICAL

Standard	UL	IEC
Rated voltage	150V	130V
Rated current	5A	17.5A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC1500V/1Min	

MECHANICAL

Temp. range -40℃~+105℃
Max. soldering +250℃ for 5 Sec

