


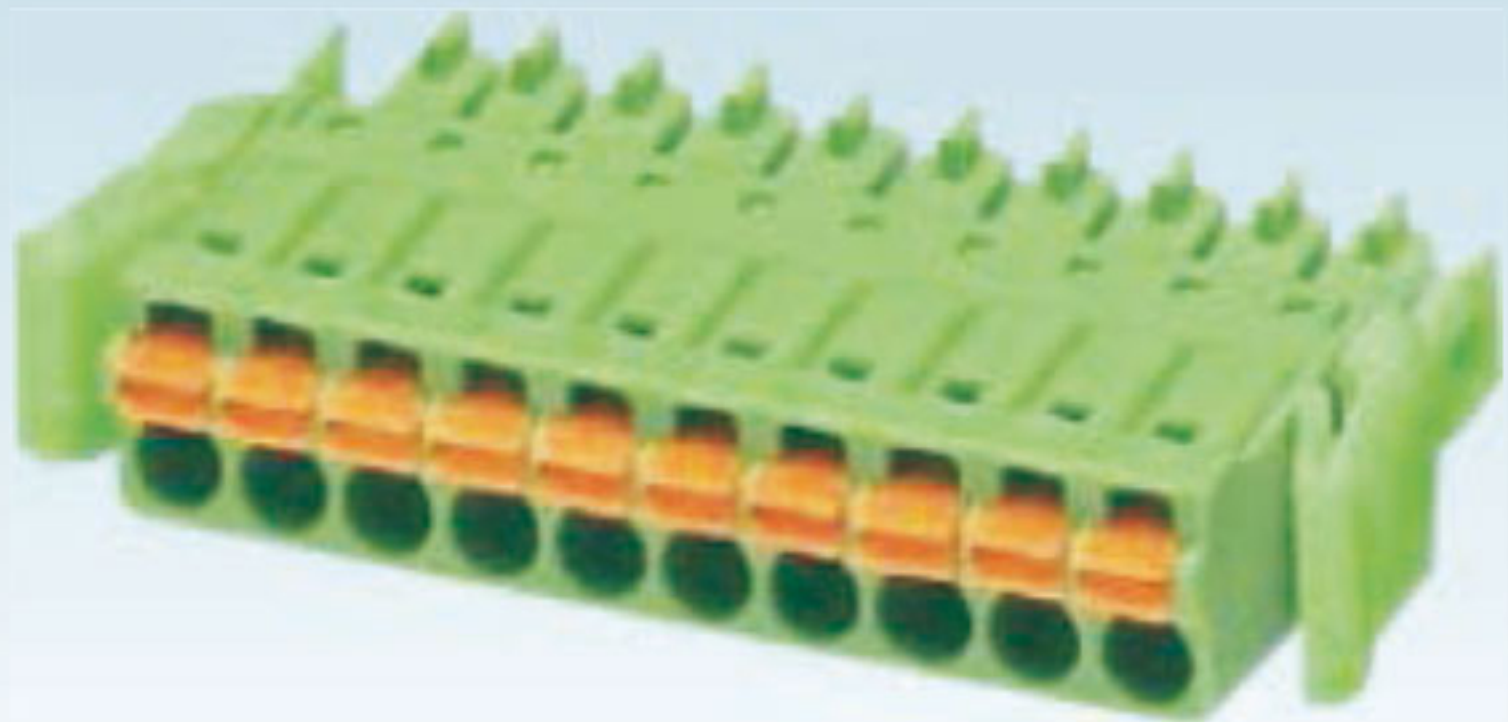

Pitch:3.5mm

MODEL:JL15EDGKNG-3.5

认证/CERTIFICATION	
------------------	--

材质及电镀		
夹子	磷青铜, 镀镍	
弹片	不锈钢	
塑件	PA66, UL94V-0	
电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	8A	10A
使用线径	24~16AWG	1.0mm ²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
机械性能		
温度范围	-40℃~+105℃	
剥线长度	9-10mm	

MATERIAL		
Clamp	Phosphor bronze, Ni plated	
Shrapnel	Stainless steel	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	10A
Wire range	24~16AWG	1.0mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Strip length	9~10mm	

