
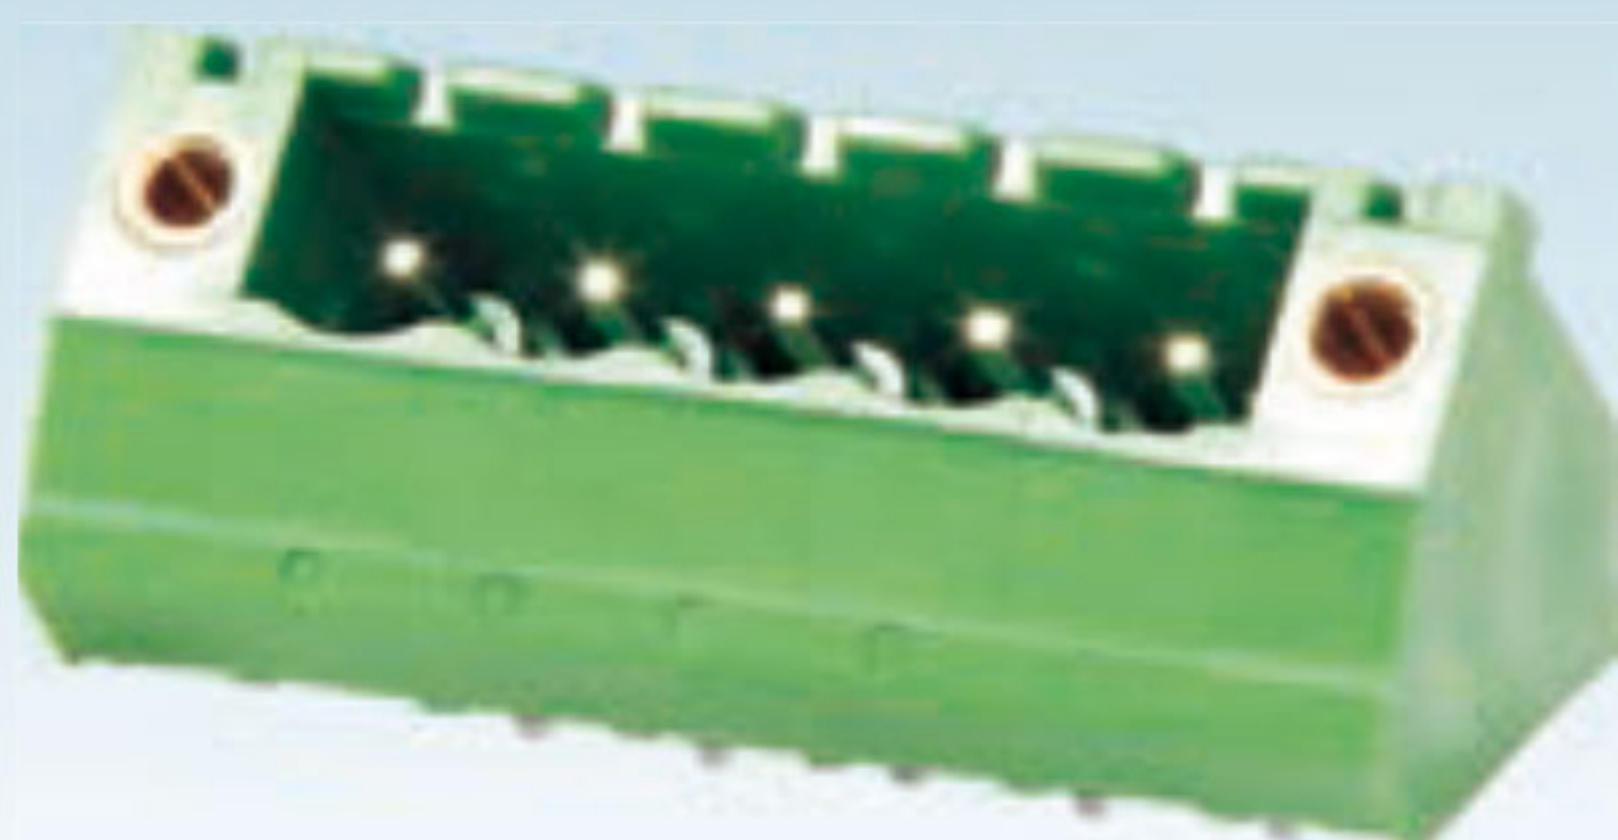




Pitch:5.0/5.08mm

MODEL:JL2EDGLM

认证/CERTIFICATION	
------------------	---

材质及电镀	
螺母	M2.5, 黄铜
焊针	黄铜, 镀锡
塑件	PA66, UL94V-0


电气性能		
参考标准	UL	IEC
额定电压	300V	450V
额定电流	15A	20A
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	

机械性能	
温度范围	-40℃~+105℃
瞬时温度	+250℃ 5秒

MATERIAL	
Nut	M2.5, Brass
Pin header	Brass, Si plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	15A	20A
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	

MECHANICAL	
Temp. range	-40°C~+105°C
Max. soldering	+250°C for 5 Sec

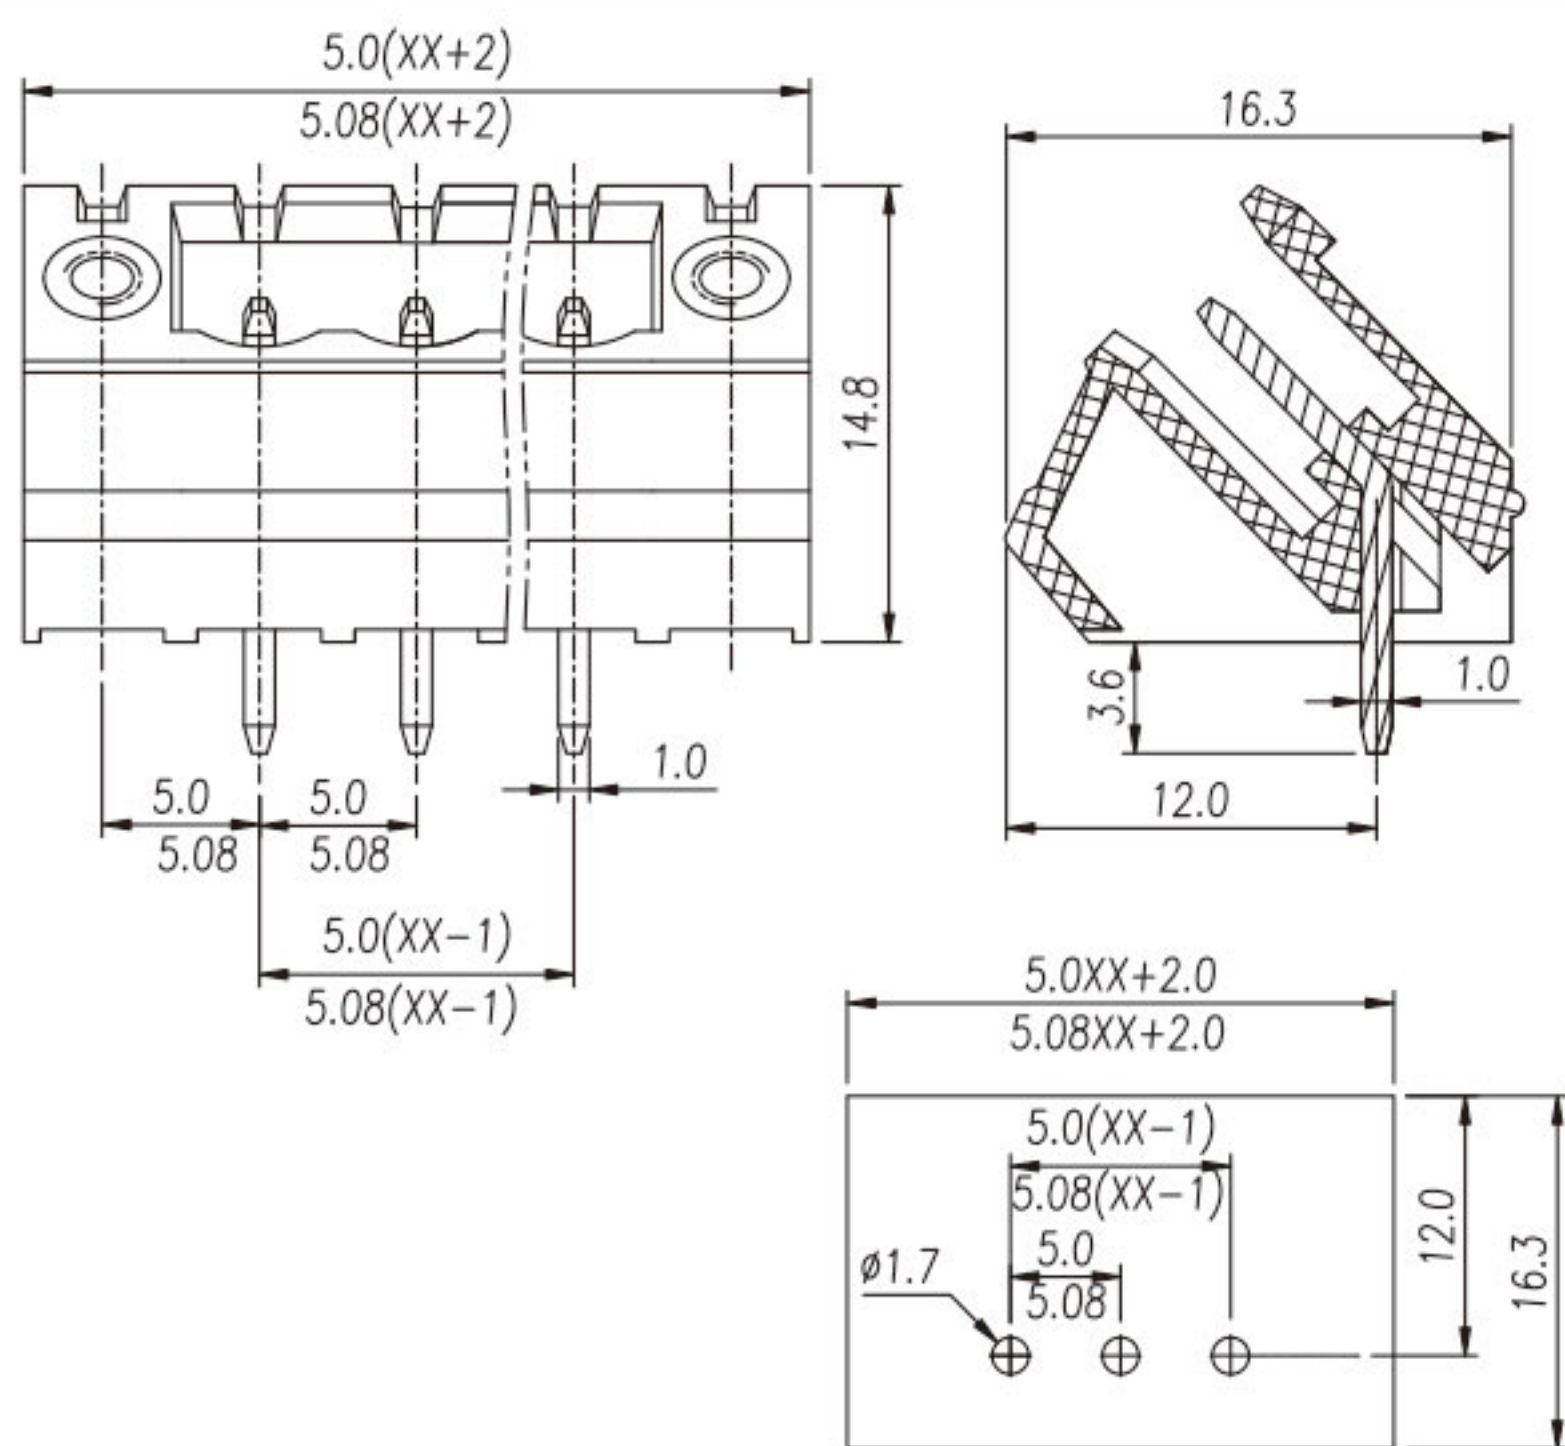

P.C.B. LAYOUT