


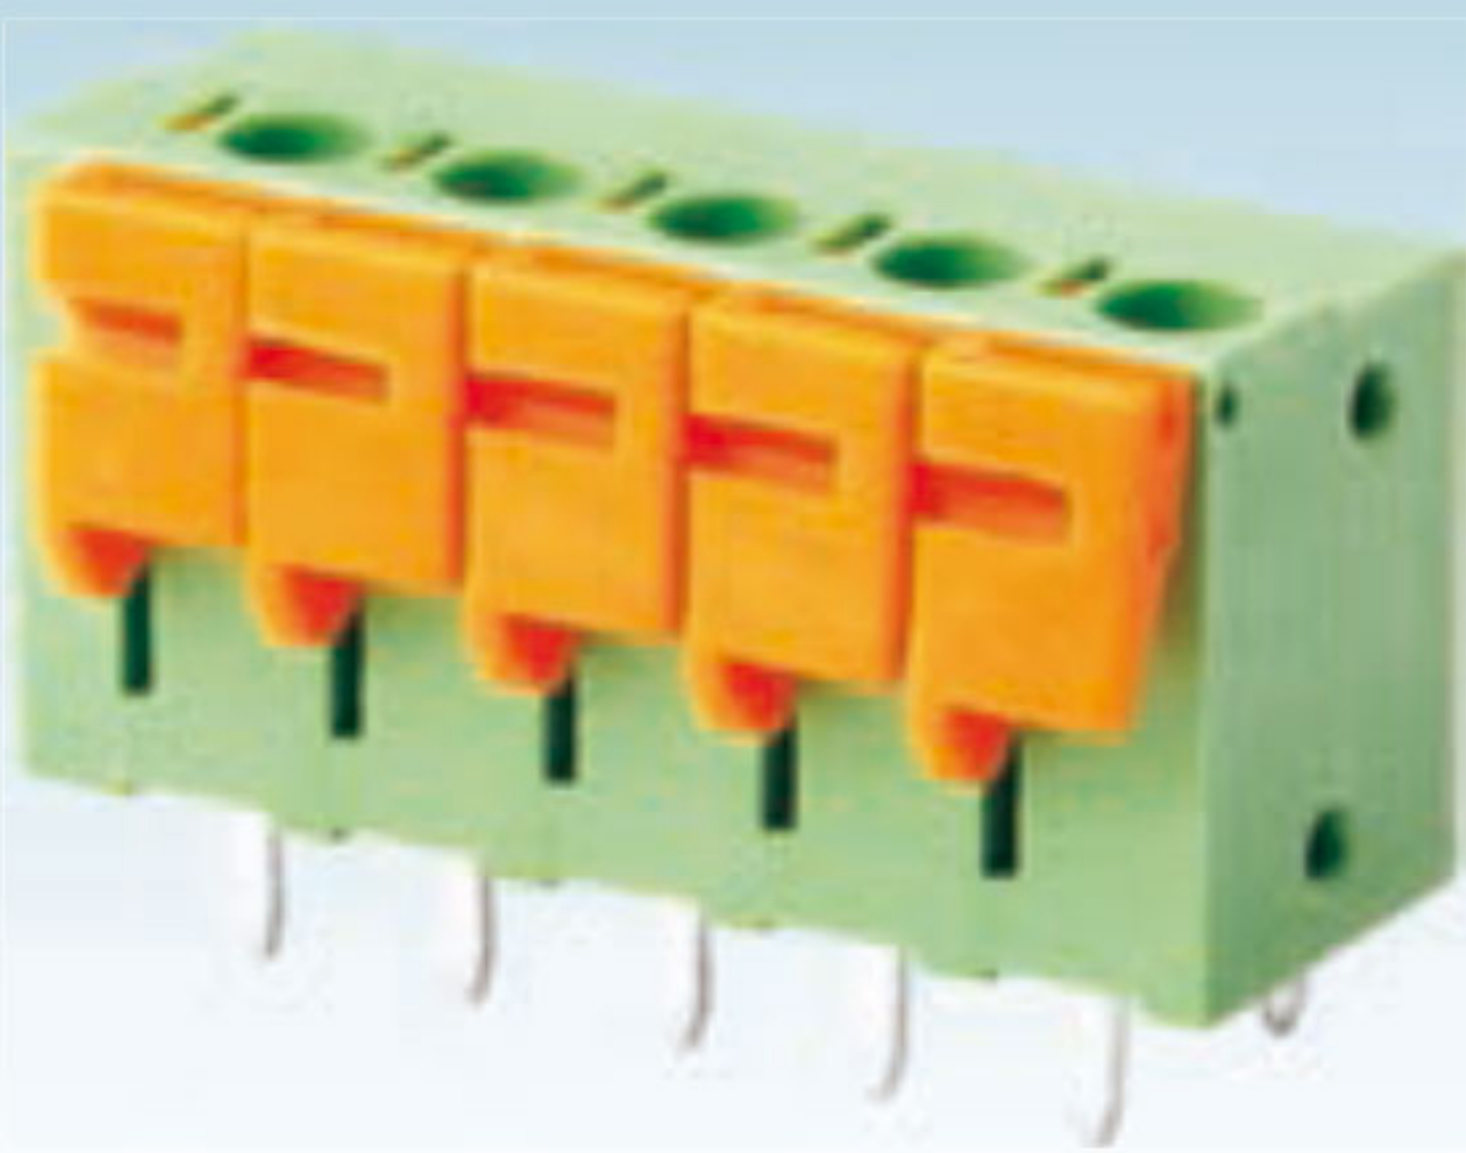

Pitch:5.08/7.62mm

MODEL:JL142V

认证/CERTIFICATION	
------------------	--

材质及电镀	不锈钢 黄铜, 镀锡 PA66, UL94V-0	
弹片		
焊针		
塑件		
电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	10A	15A
使用线径	22-16AWG	1.5mm ²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
机械性能		
温度范围	-40℃~+105℃	
瞬时温度	+250℃ 5秒	
剥线长度	9-10mm	

MATERIAL		
Wire guard	Stainless steel	
Pin header	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	15A
Wire range	22-16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Max. soldering	+250℃ 5 Sec	
Strip length	9-10mm	

