


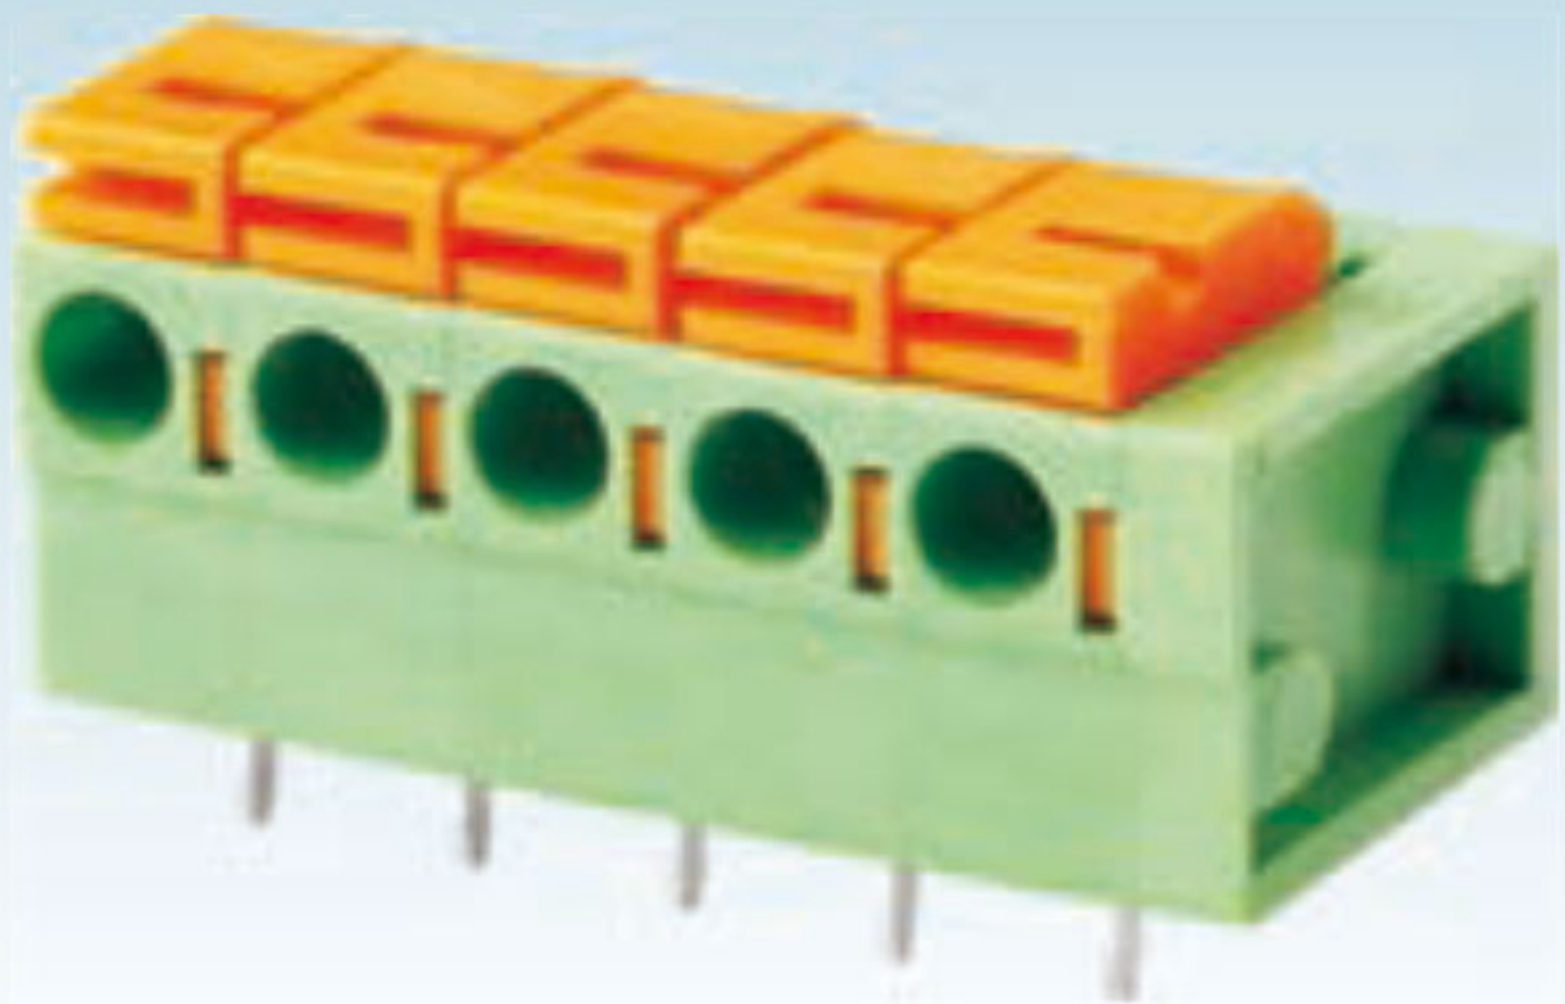

Pitch:5.08/7.62mm

MODEL:JL142R

认证/CERTIFICATION	
------------------	--

材质及电镀	
弹片	不锈钢
焊针	黄铜, 镀锡
塑件	PA66, UL94V-0

电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	10A	15A
使用线径	22-16AWG	1.5mm ²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	

机械性能	
温度范围	-40℃~+105℃
瞬时温度	+250℃ 5秒
剥线长度	9-10mm

MATERIAL	
Wire guard	Stainless steel
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	15A
Wire range	22-16AWG	1.5mm ²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	

MECHANICAL	
Temp. range	-40℃~+105℃
Max. soldering	+250℃ 5 Sec
Strip length	9-10mm

