


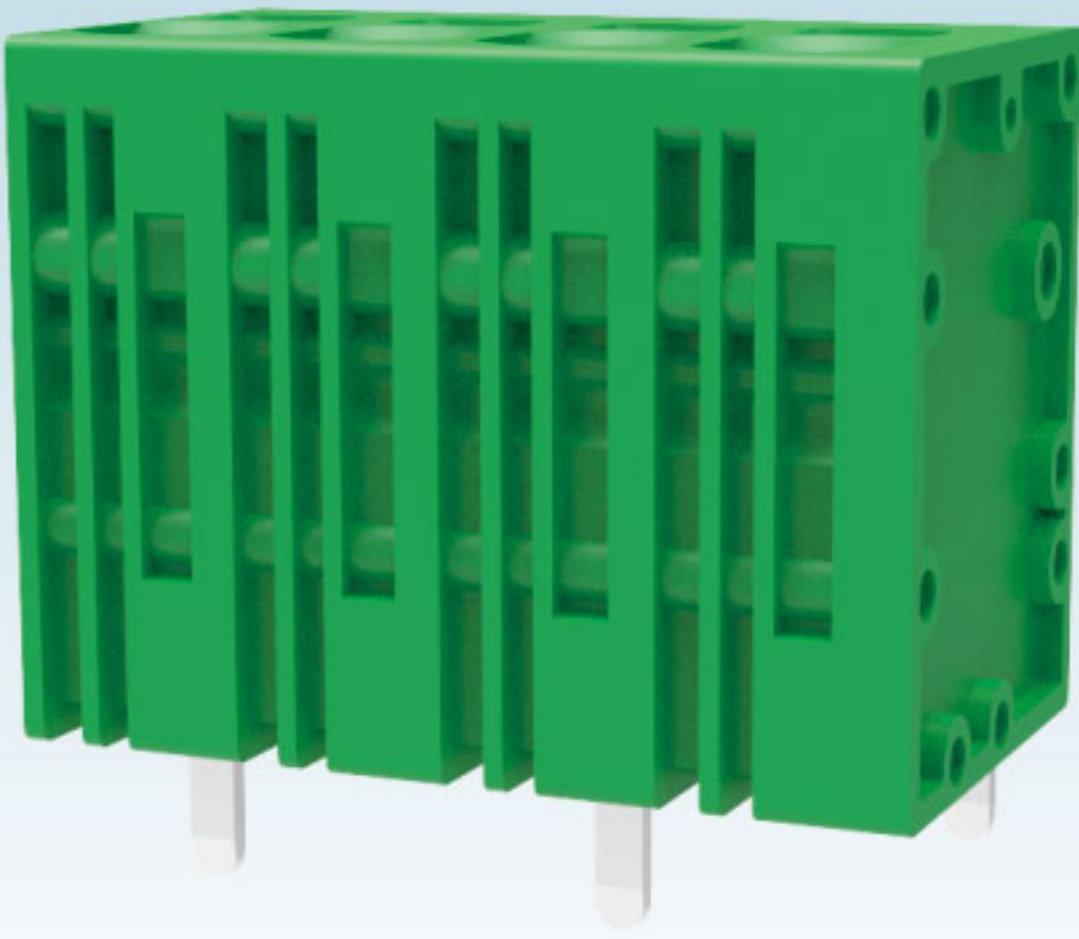

Pitch:7.5

MODEL:JL239V

认证/CERTIFICATION	
------------------	--

材质及电镀	
弹片	不锈钢
焊针	黄铜, 镀锡
塑件	PA66, UL94V-0

电气性能		
参考标准	UL	IEC
额定电压	600V	800V
额定电流	40A	41A
使用线径	24-8 AWG	
接触电阻		
绝缘电阻		
耐电压		

机械性能	
温度范围	-40℃~+105℃
瞬时温度	+250℃ 5秒
剥线长度	15mm

MATERIAL	
Wire guard	Stainless steel
Pin header	Brass, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	800V
Rated current	40A	41A
Wire range	24-8 AWG	
Contact resistance		
Insulation resistance		
Withstanding voltage		

MECHANICAL	
Temp. range	-40℃~+105℃
Max. soldering	+250℃ 5 Sec
Strip length	9-10mm

