



MODEL: MY__HS+4.3

认证/CERTIFICATION



底部: H型底部加高4.3mm
螺丝: 钢, 镀锌
方块: 铁复合铜, 镀锌
材质: PA66, UL94V-2
温度范围: -40℃~+105℃
接线排数: 2-12P

Base: With 4.3mm elevated base
Screws: Steel, Zn plated
Clamp: Cladded copper strips, Zn plated
Housing material: PA66, UL94V-2
Temp. range: -40°C~+105°C
Poles available: 2-12P

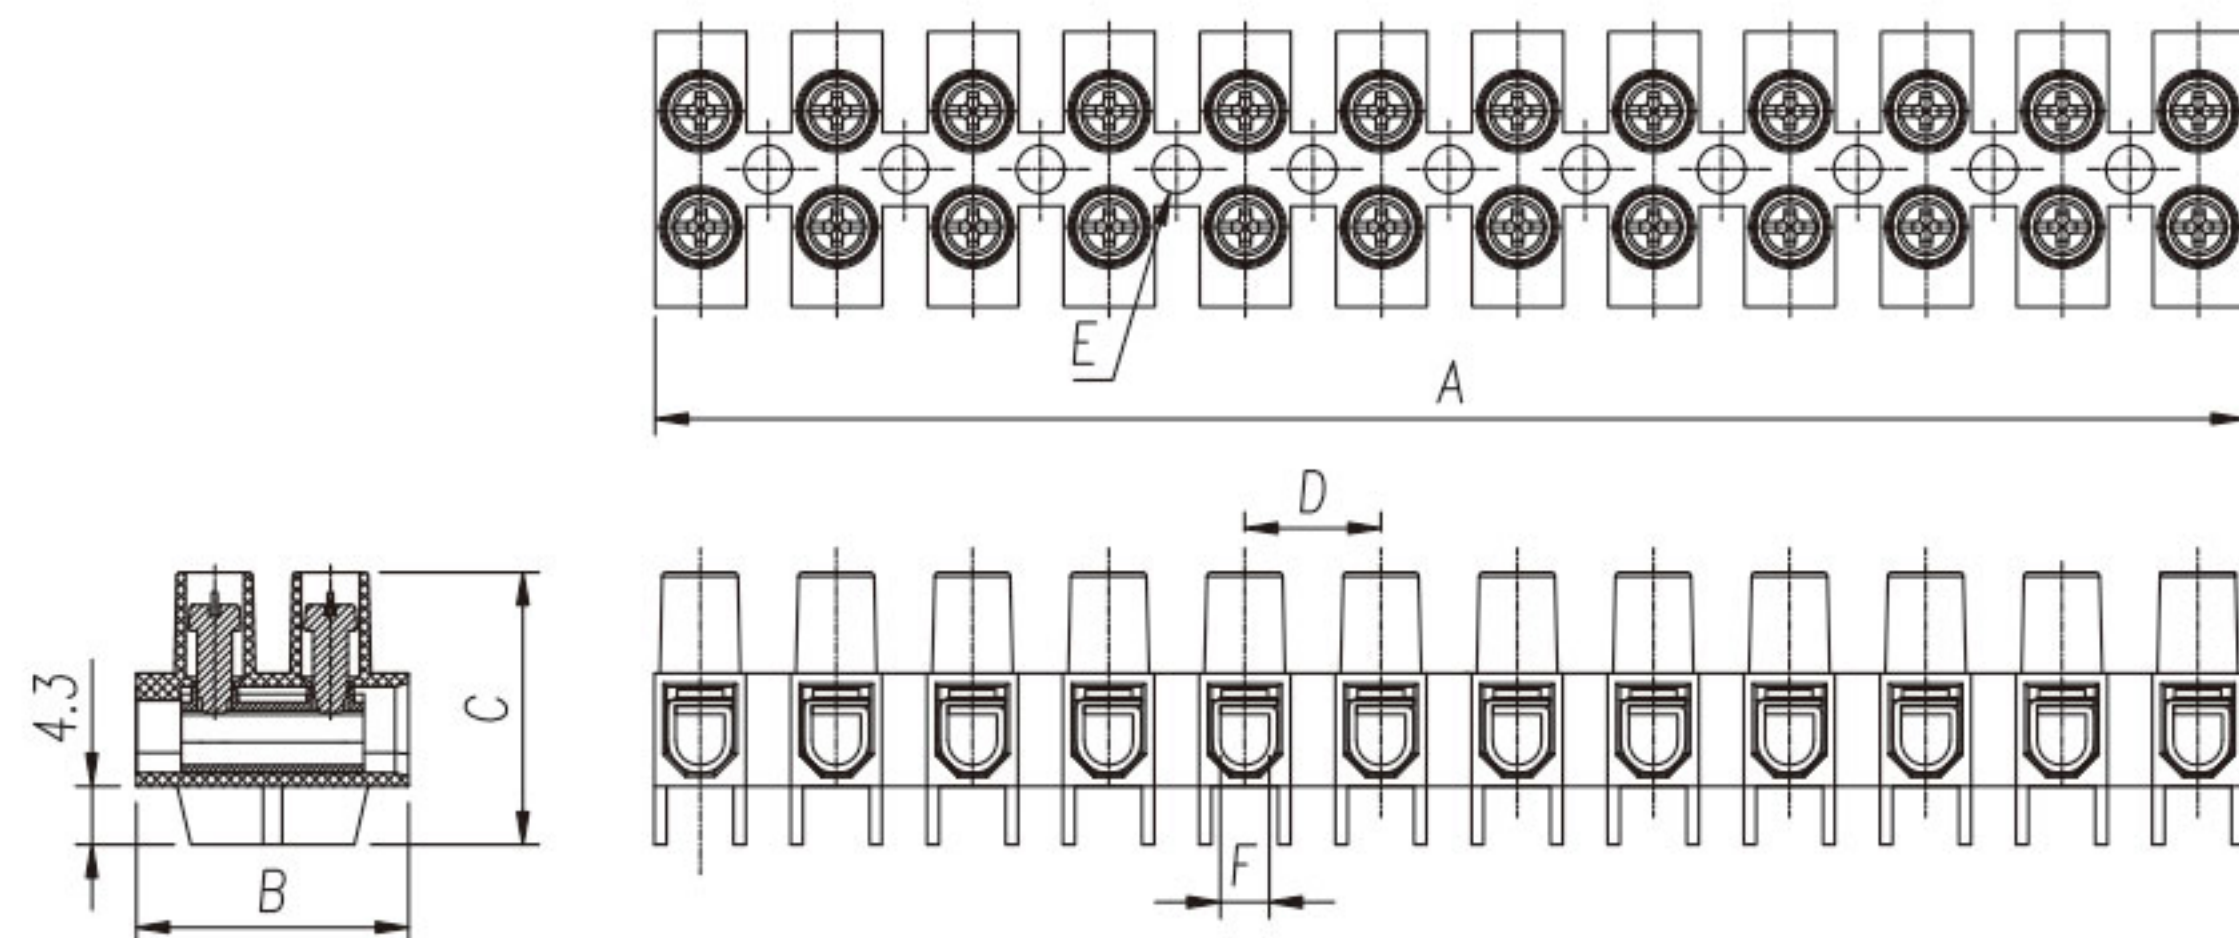[illegible]