


MODEL: MY__HW+1.2

带弹片 Wire Protector

认证/CERTIFICATION



底部: H型底部加高1.2mm	Base: With 1.2mm elevated base
螺丝: 钢, 镀锌	Screws: Steel Ni plated
方块: 黄铜, 镀镍	Clamp: Brass, Ni plated
弹片: 磷青铜, 镀镍	Shrapnel: Phosphor bronze, Ni plated
材质: PA66, UL94V-2	Housing material: PA66, UL94V-2
温度范围: -40℃~+105℃	Temp. range: -40℃~+105℃
接线排数: 2-12P	Poles available: 2-12P

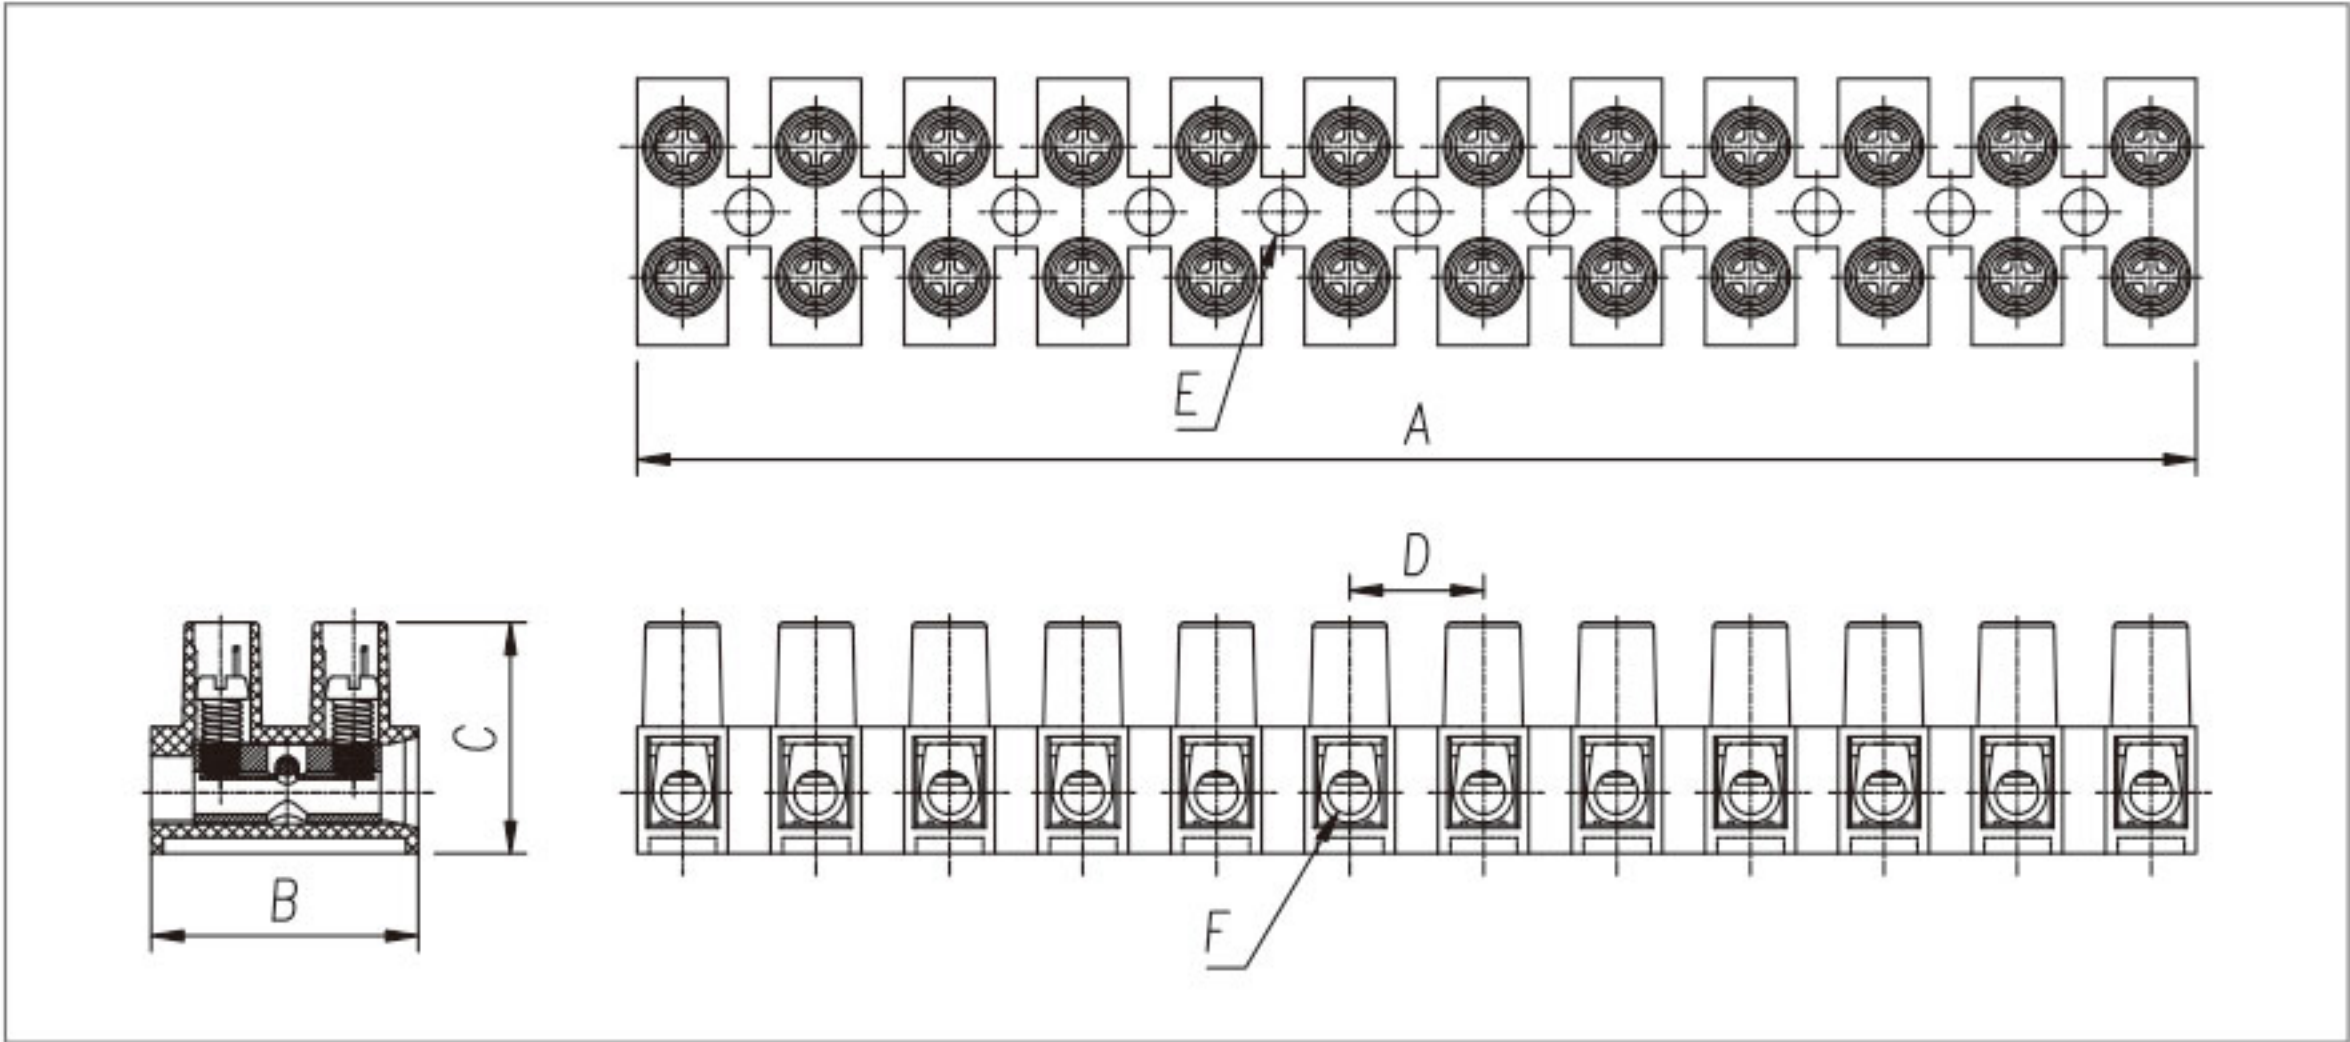

型号 Model	线径 mm ²	UL		ICE		螺丝 Screw	尺寸 Dimensions(mm/in)						
		电压	电流	电压	电流		Unit	A	B	C	D	E	F
MY8HW+1.2	1.5	300V	17.5A	450V	24A	M2.6x5	mm	94.0	17.0	14.20	8.00	3.00	2.80
MY10HW+1.2	2.5	300V	28A	750V	24A	M3.0x6	mm	116.7	20.3	17.20	10.00	3.50	3.20
MY12HW+1.2	6.0	600V	41A	750V	45A	M3.5x7	mm	139.7	24.0	19.00	12.00	3.90	3.90
MY16HW+1.2	10.0	600V	57A	750V	60A	M4.0x9	mm	171.3	32.0	25.00	14.60	4.40	4.80