


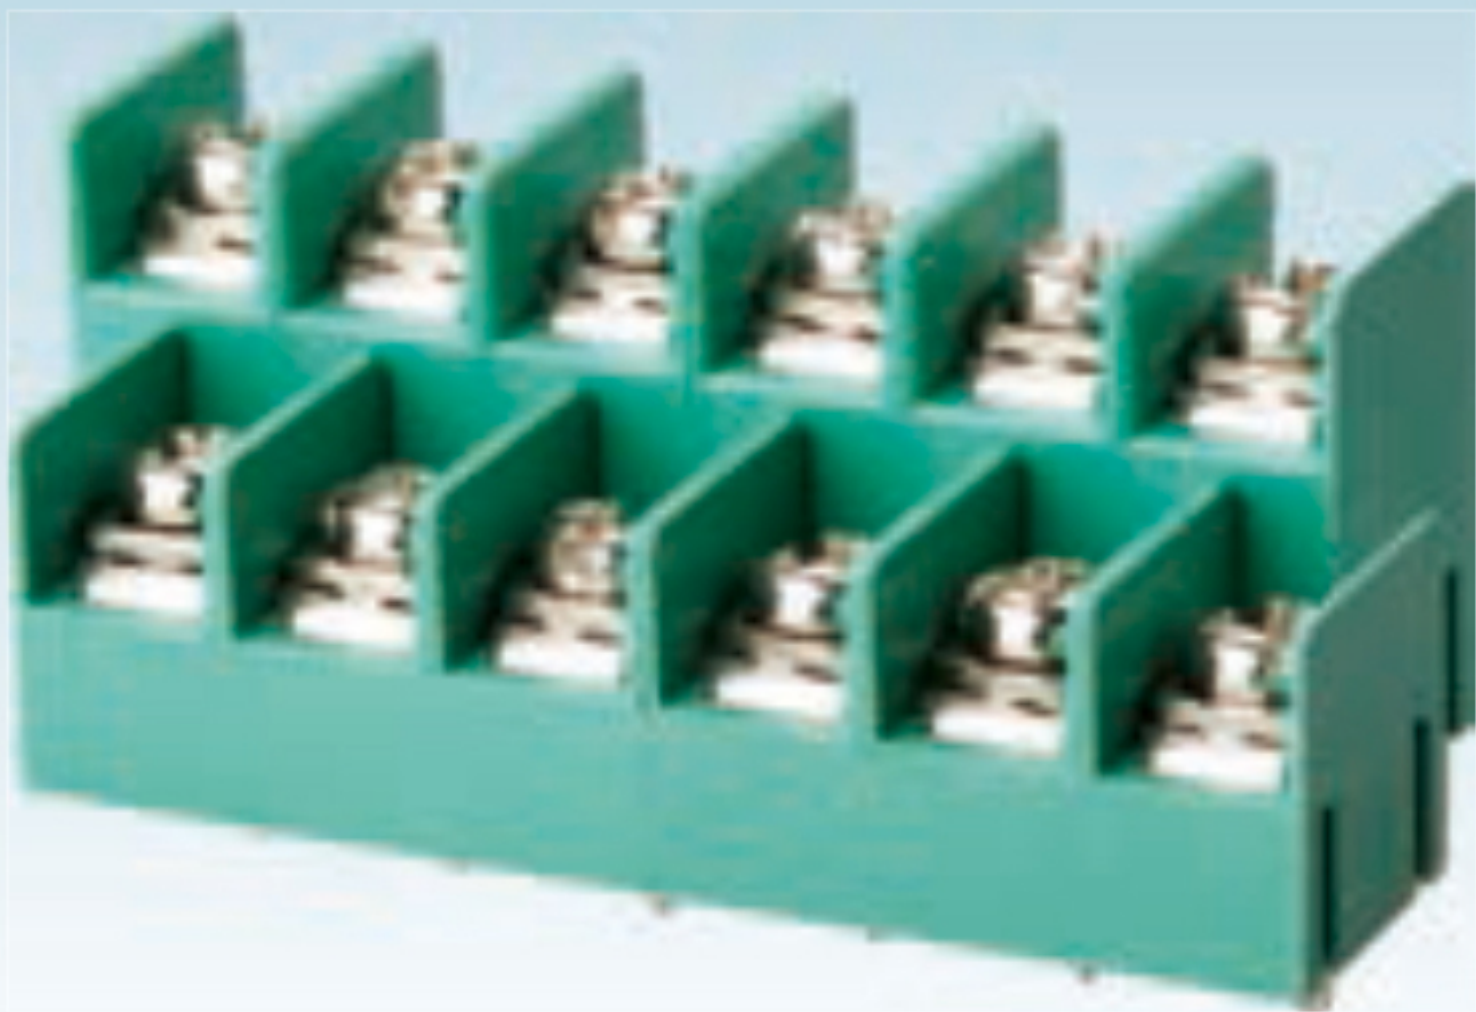

Pitch:7.62mm

MODEL:JL7620A

认证/CERTIFICATION	CQC
------------------	-----

材质及电镀		
螺丝	M3.0, 钢 镀镍	
焊脚	黄铜, 镀锡	
塑件	PA66, UL94V-0	
电气性能		
参考标准	UL	IEC
额定电压	300V	450V
额定电流	10A	17.5A
使用线径	22-16AWG	1.5mm ²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
机械性能		
温度范围	-40℃~+105℃	
扭矩	5.10kgf-cm/0.5Nm/4.43Lbin	

MATERIAL		
Screws	M3.0 Steel Ni plated	
Pin Herder	Brass, Sn plated	
Housing	PA66, UL94V-0	
ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	450V
Rated current	10A	17.5A
Wire range	22-16AWG	1.5mm ²
Contact Resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
MECHANICAL		
Temp. range	-40℃~+105℃	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	

